


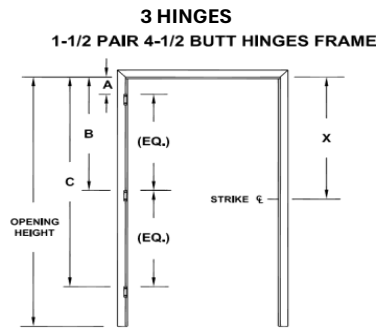


OPENING HT	A	B	C	X
80	5	35 1/4	65 1/2	42
81	5	35 3/4	66 1/2	43
82	5	36 1/4	67 1/2	44
83	5	36 3/4	68 1/2	45
84	5	37 1/4	69 1/2	46
85	5	37 3/4	70 1/2	47
86	5	38 1/4	71 1/2	48
87	5	38 3/4	72 1/2	49
88	5	39 1/4	73 1/2	50
89	5	39 3/4	74 1/2	51
90	5	40 1/4	74 1/2	52

Notes:

1. All dimensions are in inches
2. All hinge locations are from bottom of header to top of hinge
3. All strike locations are from bottom of header to centerline of strike

* ACS can accommodate any custom hinge or strike layout

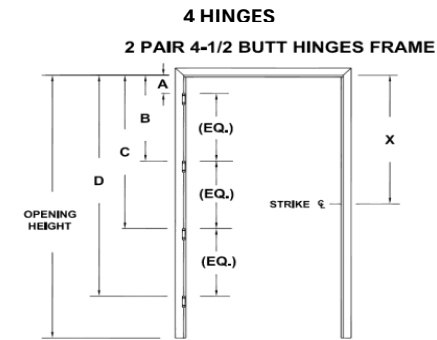

OPENING HT	A	B	C	D	X
90	5	28 1/2	52	75 1/2	52
91	5	28 7/8	52 3/4	76 5/8	53
92	5	29 1/4	53 1/2	77 3/4	54
93	5	29 1/2	54	78 1/2	55
94	5	29 7/8	54 3/4	79 5/8	56
95	5	30 1/4	55 1/2	80 3/4	57
96	5	30 1/2	56	81 1/2	58
97	5	30 7/8	56 3/4	82 5/8	59
98	5	31 1/4	57 1/2	83 3/4	60
99	5	31 1/2	58	84 1/2	61
100	5	31 7/8	58 3/4	85 5/8	62
101	5	32 1/4	59 1/2	86 3/4	63
102	5	32 1/2	60	87 1/2	64
103	5	32 7/8	60 3/4	88 5/8	65
104	5	33 1/4	61 1/2	89 3/4	66
105	5	33 1/2	62	90 1/2	67
106	5	33 7/8	62 3/4	91 5/8	68
107	5	34 1/4	63 1/2	92 3/4	69
108	5	34 1/2	64	93 1/2	70
109	5	34 7/8	64 3/4	94 5/8	71
110	5	35 1/4	65 1/2	95 3/4	72
111	5	35 1/2	66	96 1/2	73
112	5	35 7/8	66 3/4	97 5/8	74
113	5	36 1/4	67 1/2	98 3/4	75
114	5	36 1/2	68	99 1/2	76
115	5	36 7/8	68 3/4	100 5/8	77
116	5	37 1/4	69 1/2	101 3/4	78
117	5	37 1/2	70	102 1/2	79
118	5	37 7/8	70 3/4	103 5/8	80
119	5	38 1/4	71 1/2	104 3/4	81
120	5	38 1/2	72	105 1/2	82

Hardware Locations